




MMD
EQUIPMENT

- 4 x 1000 watt metal-halide lamps
- 360 degree light rotation with locking system
- Infinite fixture adjustment for multi-directional lighting and optimum area coverage
- Hydraulic cylinder raises vertical seven-section mast to 28 feet in just 24 seconds.
- Kubota D-1105 Engine — Tier 4
- 8kW generator with 120V GFCI duplex outlet and L6-30 230V twist lock standard
- 36 gallon fuel tank; consumes just 0.5 gallon/hour; operates for 72 hours.
- Individual switching circuit breakers for lights and auxiliary power
- Eight-event programmable timer with auto start and warm up/cool down features
- Hour meter with tach, battery condition and maintenance reminders
- Powder coated body with zinc plated tower
- Easy access external oil and fuel drains; 110% fluid containment
- Skid mount option
- Rear hitch plate for multi-unit deployment/ collection
- Single lifting eye and forklift pockets
- Five-point stability
- Torsion axle

MMD Lynx Lite Pro 8

Revolutionizing
the lighting industry!

Model LRLT-8000

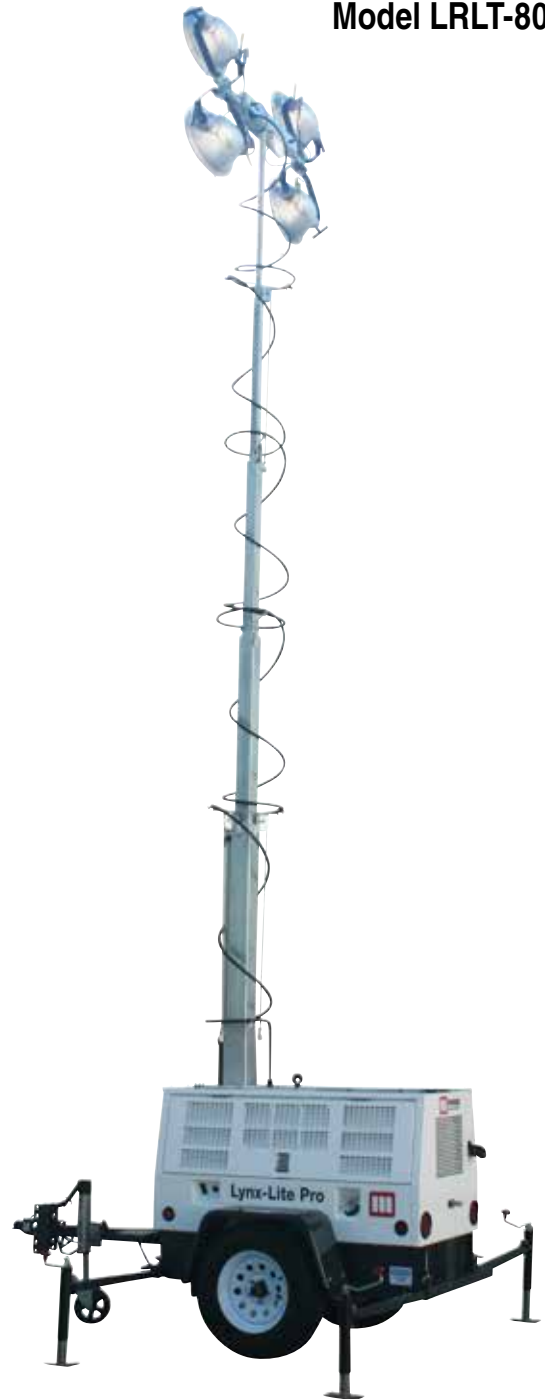

MMD Equipment

4175 Guardian Street • Simi Valley, CA 93063
602 Dunton St. • San Antonio, TX 78226

Phone: 800-433-1382

Fax: 800-225-5579

www.mmdequipment.com

MMD Lynx Lite Pro 8

MMD Lynx Lite Pro 8 — Specifications

Model	LRLT-8000
Runtime	72 hr.
Lamp	4 x 1000 W metal halide
Lumens	440,000 (4x110,000)
Max. Mast Height	28 ft.
Max. Wind Resistance	65 mph
Weight (Dry/ Operating)	2500 lb. / 2800 lb.
Support Points	5
Tire Size	15 in.
Engine Model	Kubota D-1105
Engine Type	4 cycle water cooled
EPA Emission Level	Tier 4
Engine Displacement	68.53 cu. in.
Horsepower	17
Fuel Type	Diesel
Fuel Capacity	36 gal.
Power Output	8 kw
Frequency	60 hZ
Receptacles	120V GFCI Duplex; L6-30 230V twist lock standard
Dimensions (LXWXH)	113 x 53 x 111 in

© COPYRIGHT 2016 MMD EQUIPMENT LTR345 Rev. 3 (0816)



Full instrumentation includes hourmeter, eight-event timer, and battery indicator.

The MMD Lynx Lite Pro 8 light tower features a durable and efficient Kubota Tier-4 engine with a 72 hour runtime. The four 1000 watt metal-halide lamps produce lighting for any situation. An eight-event programmable timer — with auto start and warm up/cool down features — makes automatic operation easy. The lighting fixture is fully adjustable and multi-directional with 360 degree rotation. The fully hydraulic cylinder can rise to 28 feet in just 24 seconds. Units are designed with environmentally friendly 110% fluid containment, so no harmful chemicals are exposed to our environment. Maintenance is simplified with easy access to external oil and fuel drains.



Specifications subject to change without notice.

MMD Equipment

4175 Guardian Street • Simi Valley, CA 93063
602 Dunton Street • San Antonio, TX 78226

Phone: 800-433-1382 • Fax: 800-225-5579
www.mmdequipment.com



Find us on the web.